

**AMENDMENTS TO THE DRAWINGS**

In response to the Office action identified above, Fig. 2-5 has been revised. One clean copy of Fig. 2-5 has been provided along with one marked copy showing the changes made.

In Fig. 2, the acoustic signal input device (22) comprises an amplifying element array (30), and the acoustic signal output device (26) comprises another amplifying element array (40). The hearing aid device receives an acoustic signal input and outputs an acoustic signal output.

In Fig. 3, the acoustic signal input device (22) receives an acoustic signal input and comprises an amplifying element array (30).

In Fig. 4, the acoustic signal output device (26) comprises an amplifying element array (40) and outputs an acoustic signal output.

In Fig. 5, the bandpass filter (32) comprises two acoustic receiving units (11), (12) with different resonant frequencies and a differential amplifier (13).

No new matter is introduced.

Attachment: Replacement Sheet  
Annotated Sheet Showing Changes

## REPLACEMENT SHEET

5

13

14 Aug 2003 17:47

Winston Hsu 41526

886289237390

P.17

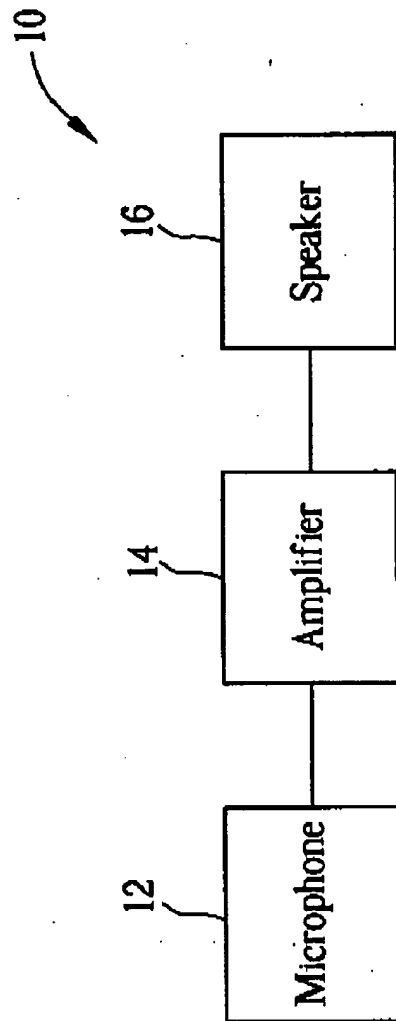


Fig. 1 Prior art

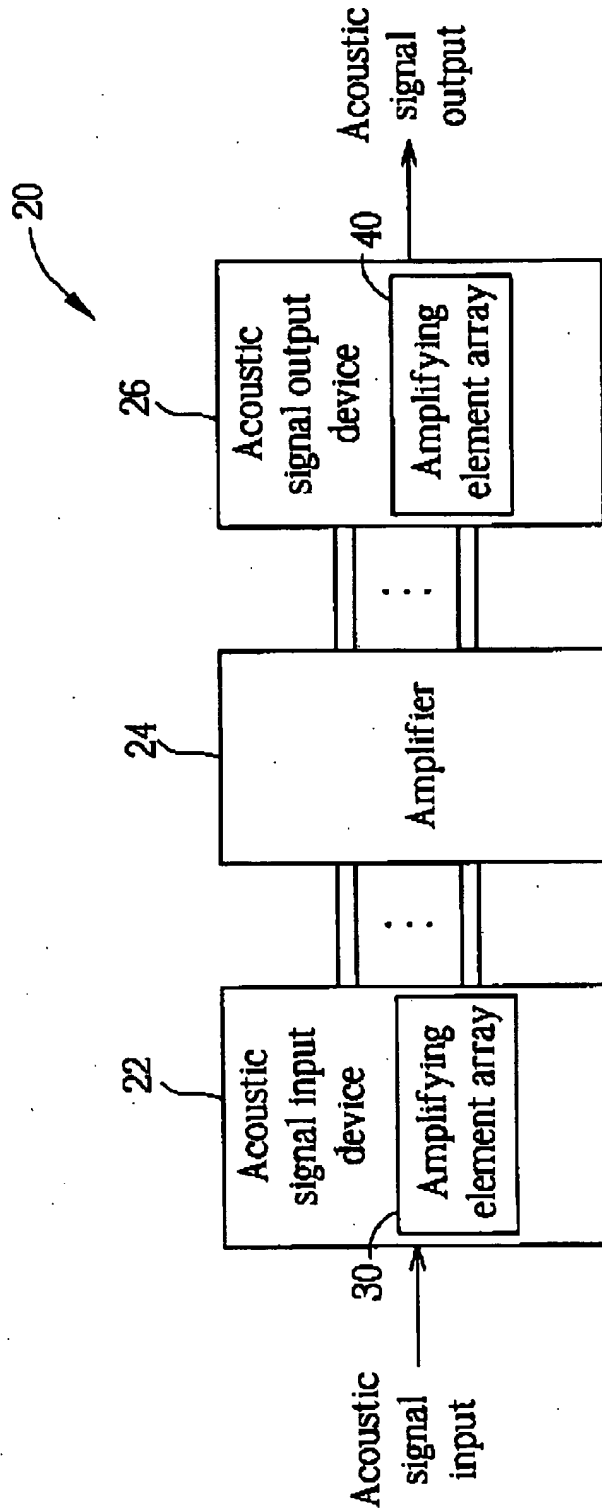


Fig. 2

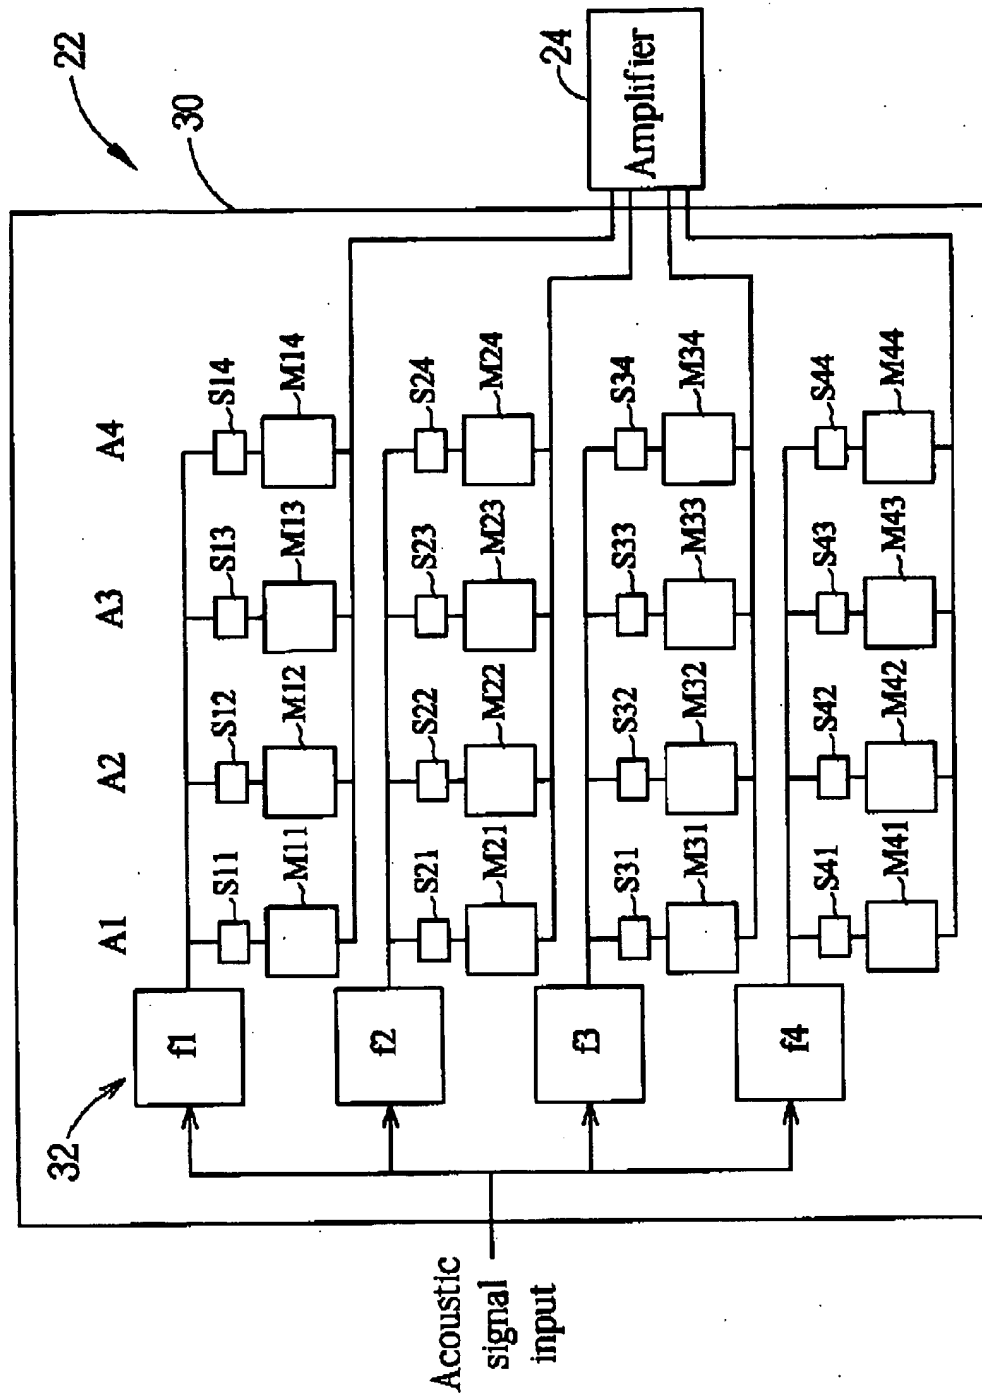


Fig. 3

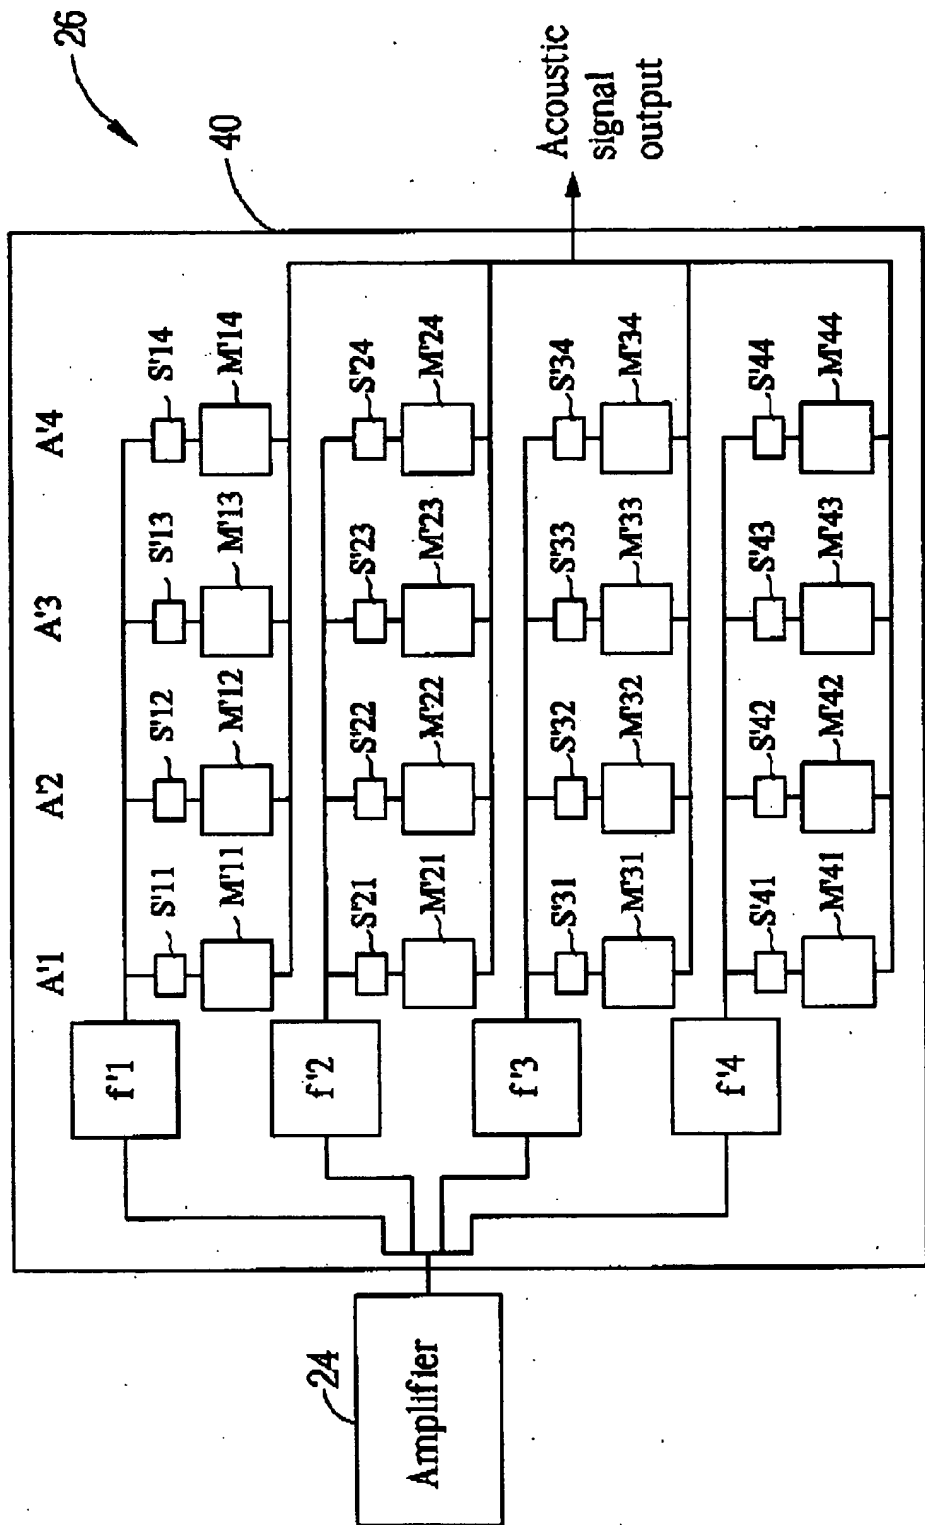


Fig. 4

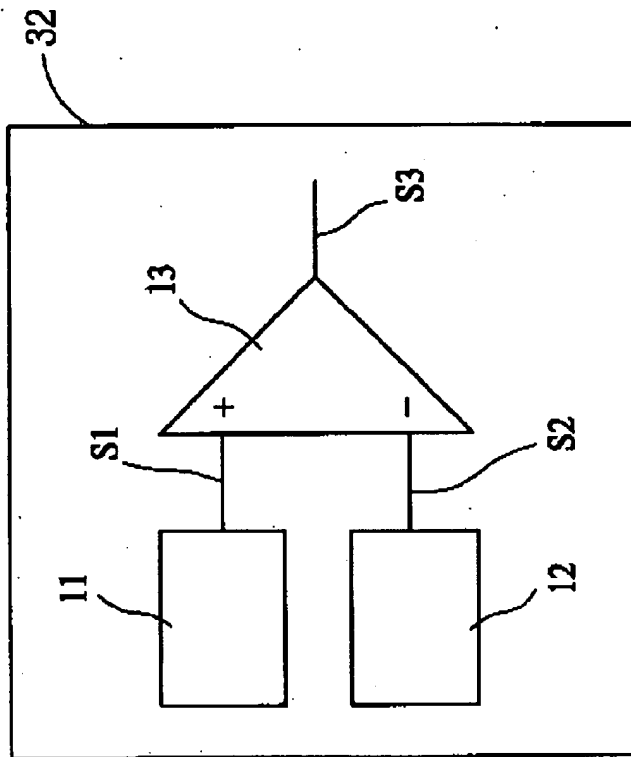


Fig. 5